Name of the work : **Improvements of CC drain & Covering Slab Bylappa Circle Left side to Nelamaheshwaramma temple road in Dasarahalli Ward No 15**

ಅಂದಾಜಿಗೆ ವರದಿ

ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ, ದಾಸರಹಳ್ಳಿ ವಲಯ ವ್ಯಾಪ್ತಿಯ ದಾಸರಹಳ್ಳಿ ವಾರ್ಡ್ ನಂ.15ರ ಬೈಲಪ್ಪ ಸರ್ಕಲ್‌ನಿಂದ ನೆಲಮಹೇಶ್ವರಮ್ಮ ದೇವಸ್ಥಾನದವರೆಗೆ ಈ ಹಿಂದೆ ನಿರ್ಮಾಣವಾಗಿದ್ದ ಸಿಮೆಂಟ್ ಕಾಂಕ್ರೀಟ್ ಚರಂಡಿಯು ಸಂಪೂರ್ಣ ಹಾಳಾಗಿದ್ದು, ಚರಂಡಿಯಲ್ಲಿ ನೀರು ಸರಾಗವಾಗಿ ಹರಿಯದೇ ರಸ್ತೆಯ ಮೇಲ್ಭಾಗದಲ್ಲಿ ಹರಿಯುತ್ತಿರುತ್ತದೆ. ಆದ್ದರಿಂದ ಹೊಸದಾಗಿ ಸಿಮೆಂಟ್ ಕಾಂಕ್ರೀಟ್ ಚರಂಡಿ ನಿರ್ಮಾಣ ಮಾಡಿ ಚರಂಡಿಯ ಮೇಲ್ಭಾಗದಲ್ಲಿ ಕವರಿಂಗ್ ಸ್ಲ್ಯಾಬ್ ಅಳವಡಿಸಲು ಈ ಅಂದಾಜಿನಲ್ಲಿ ಉದ್ದೇಶಿಸಲಾಗಿದೆ.

ಮುಂದುವರೆದಂತೆ 2018–19ನೇ ಸಾಲಿಗೆ ವಾರ್ಷಿಕ ಕಾರ್ಯಕ್ರಮ ಪಟ್ಟಿಯ ರೂ.300.00 ಲಕ್ಷಗಳಲ್ಲಿ ಮೀಸಲಿಡಲಾದ ರೂ.30.00 ಲಕ್ಷಗಳನ್ನು ಬೈಲಪ್ಪ ಸರ್ಕಲ್‌ನಿಂದ ನೆಲಮಹೇಶ್ವರಮ್ಮ ದೇವಸ್ಥಾನದವರೆಗೆ ಸಿಮೆಂಟ್ ಕಾಂಕ್ರೀಟ್ ಚರಂಡಿ ನಿರ್ಮಾಣ ಮಾಡಿ ಚರಂಡಿಯ ಮೇಲ್ಭಾಗದಲ್ಲಿ ಕವರಿಂಗ್ ಸ್ಲ್ಯಾಬ್ ಅಳವಡಿಸಲು ಈ ಅಂದಾಜಿನಲ್ಲಿ ಉದ್ದೇಶಿಸಲಾಗಿದೆ.

ಅಂದಾಜಿನಲ್ಲಿ ಈ ಕೆಳಕಂಡ ಅಂಶಗಳನ್ನು ಅಳವಡಿಸಿಕೊಳ್ಳಲಾಗಿದೆ.

1. ಮಣ್ಣುಪಾಯ ತೆಗೆಯುವುದು
2. 1:4:8 ಹಾಕುವುದು
3. ಎಂ.20 ಸಿಮೆಂಟ್ ಕಾಂಕ್ರೀಟ್ ಅಳವಡಿಸುವುದು (ಆರ್.ಸಿ.ಸಿ)
3. ಕವರಿಂಗ್ ಸ್ಲ್ಯಾಬ್ ಅಳವಡಿಸುವುದು (ಆರ್.ಸಿ.ಸಿ)
4. ಚರಂಡಿಗಾಗಿ ಸಿಮೆಂಟ್ ಗೋಡೆಗಳಿಗೆ ಕಬ್ಬಿಣದ ಸರಳುಗಳನ್ನು ಅಳವಡಿಸುವುದು.

ಇತ್ಯಾದಿ ಮುಂತಾದ ಅಂಶಗಳನ್ನು ಅಳವಡಿಸಿಕೊಂಡು ಲೋಕೋಪಯೋಗಿ ಇಲಾಖೆ ಬೆಂಗಳೂರು ವೃತ್ತ ಕಛೇರಿಯ ದರಪಟ್ಟಿಯಂತೆ 2018–19ನೇ ಸಾಲಿಗೆ ರೂ.30.00 ಲಕ್ಷಗಳಿಗೆ ಅತೀ ಸೂಕ್ಷ್ಮ ಸರಳತೆ ಅನುಸರಿಸಿ ಅಂದಾಜನ್ನು ತಯಾರಿಸಿ ಅಂದಾಜಿಗೆ ಆಡಳಿತಾತ್ಮಕ ಹಾಗೂ ತಾಂತ್ರಿಕ ಅನುಮೋದನೆಯನ್ನು ನೀಡಲು ಕೋರಲಾಗಿದೆ.

ಸಹಾಯಕ ಅಭಿಯಂತರರು

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಟಿ.ದಾಸರಹಳ್ಳಿ ಉಪ-ವಿಭಾಗ
ಬಾಗಲಗುಂಟೆ, ಬಿಬಿಎಂಪಿ
ಬೆಂಗಳೂರು

Scanned by CamScanner

BRUHAT BANGALORE MAHANAGARA PALIKE

DASARAHALLI ZONE

me of Work: Improvements of CC drain & Covering Slab Bylappa Circle Left le to Nelamaheshwaramma temple road in Dasarahalli Ward No 15

Description of Item	Unit	No	L	B	D	Est. Cost Rs 30.00 Lakhs Qty	Rate	Amount
KSRRB M200-Dismtling of existing structures like culverts, Bridges, retaining walls and other structure comprising of masonary, cement concrete, wood work,steel work, including T&P and scaffolding whereever necessary, sorting the dismanlet material, disposal of unserviceable material and stacking the serviceable material with all lifts complete as per specification Lime/Cement concrete I. By Manual Means C. Prestressed /Reinforced cement concrete Grade M-20 & above (P-139, lt 18.19) PWD SR 2018-19								
	Cum	1	307.00	1.20	0.15	55.26		
		2	307.00	0.15	0.90	82.89		
						138.15	1684.34	232692.00
Basic Rate	1589.00							
Add Area Weightage	95.34							
Total	1684.34							
KSRRB 300 - Excavation for road, drains and similar works - KSRRB 300-1. Earthwork excavation by manual means in Ordinary soil involving an average horizontal throw upto 2 meters and an average lift upto 0.5 m, excavated surface leveled and sides neatly dressed, the disposed earth to be leveled neatly after breaking of clods complete as per specifications complete as per specifications. MORTH Chapter 3 (P.143/I.19.1 PW, P & IWTD -SR 2018-19)								
	Cum	1	307.00	1.20	1.00	368.40		
						368.40	137.80	50766.00
Basic Rate	130.00							
Add Area Weightage 6%	7.80							
Total	137.80							
KSRRB M2100-10. Providing and laying Plain cement concrete of mix 1:3:6 with OPC @ 220kgs, with crushed 40mm and down size graded granite metal coarse aggregates @0.89cum and fine aggregates @ 0.46cum, in foundation mechanically mixed, placed in foundation and compacted by vibration including curing for 14 days including cost of all materials, labour, HOM curing, form works, scaffolding and centering complete as per specifications. MORTH Specification No. 2100 (P.222/I.27.18) PWD - SR 2018-19)								
	Cum	1	307.00	1.20	0.10	36.84		
Basic Rate	5115.00					36.84	5421.90	199743.00

Scanned by CamScanner

Add Area Weightage 6%	306.90							
Total	5421.90							
Providing and laying plain/reinforced cement concrete for side drains using M20 nominal mix concrete with OPC at 300 kgs. with 40 mm and down size granite metal coarse aggregates at 0.69 cum and fine aggregates at 0.43 cum machine mixed, well compacted for walls and bottom including centering, shuttering, cost of materials, T&OM of machinery, curing etc., complete excluding cost of steel as per MORTH specification No. 1500, 1700, 2200.(PWD SR 2018-19 Page no-271, It No 37.59.20)								
	Cum	2	307.00	0.15	0.90	82.89		
		1	307.00	0.90	0.10	27.63		
						110.52	7070.20	781399.00
Basic Rate	6670.00							
Add Area Weightage 6%	400.20							
Total	7070.20							
Supplying and fixing precast rainforced concee slab 10cm thick including cost of reinforcement as per design and drawing material cost, transportation, hire charges of machinery, machine cutting the vertical face to get plain even surface stc., complete with all leads and lift conveyance charges, labour charges inclusive of cost of all materials.								
	Sqm	1	307.00	0.90		276.30		
Data Rates Approved						276.30	2208.00	610070.00
KSRRB M2200-6. Supplying, fitting and placing TMT bar Fe 500 reinforcement in sub-structure complete as per drawing and Technical Specifications complete as per specificationsMORTH Specification No.1600 & 2200 [P. no.229 - I. no.28.8.2]PWD - SR 2018-19)								
	Tonne							
Qty Vide Item No. 5		80	110.52			8841.60		
						8841.60		
						8.84	72326.98	639486.00
Basic Rate	68233.00							
Add 6% A.W	4093.98							
TOTAL	72326.98							
Disposal of debris to the final place of disposal with all lead and lift and as direction by the engineer in charge of the work, lead 4 Km a) Basic rate for haulage of materials as per item No. 17.4/KSRRB : M100-4.1 ..... Rs. 2.00 Tonne/Km b) Average earth of work 1.28 Tonne/Km for Rs. 2.00/Km c) Add loading and unloading Page No. 76 Item No. 17.1 PWD SR 2018-19								
	Cum	Qty Vide Item No. 2				368.40	69.80	25714.00
Loading and Unloading Charges	57.00							
Lead 4 KMs 2x1.28x4	12.80							
	69.80							

Scanned by CamScanner

						Sub Total		2539870.00
Tender Premium Charge 5%								126994.00
PMC Charge 1%								25399.00
GST Charge 12%								304784.00
Miscellaneous and UnforessenCharges								2953.00
							Total	3000000.00
Rupees Thirty Lakhs Only								

CERTIFICATE:-

The Work spot has been inspected and the work is found to be necessary

The Estimate is prepared as per the PW.P & IWTD -SR-2018-19

The Provision made in estimate are adequate and essential.

This area comes under BBMP limits.

Assistant Engineer
Ward No 15

Assistant Executive Engineer
T. Dasarahalli Sub-Division
B.B.M.P

Executive Engineer
Dasarahalli Division
B.B.M.P. Bangalore.

ನಂ. EE/DD/AE/120/ದಿನಾಂಕ: 14:20 17/06/19
ರೂ. Rs 30.00 lakhs (Rupees Thirty lakhs only)
ಅಂದಾಜು ಪಟ್ಟಿಗೆ ಆಡಳಿತಾತ್ಮಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ

ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ.ದಾಸರಹಳ್ಳಿ ವಿಭಾಗ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು.

ನಂ.CE/DZ/TS/108/18-19 ದಿನಾಂಕ: 02/02/19
ರೂ. 30.00 lakhs/- (Rs 30.00 Lakhs only)
ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ತಾಂತ್ರಿಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ.

ತಾಂತ್ರಿಕ ಸಹಾಯಕರು

ಮುಖ್ಯ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ.
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು

Scanned by CamScanner

Cross Section of RCC drain

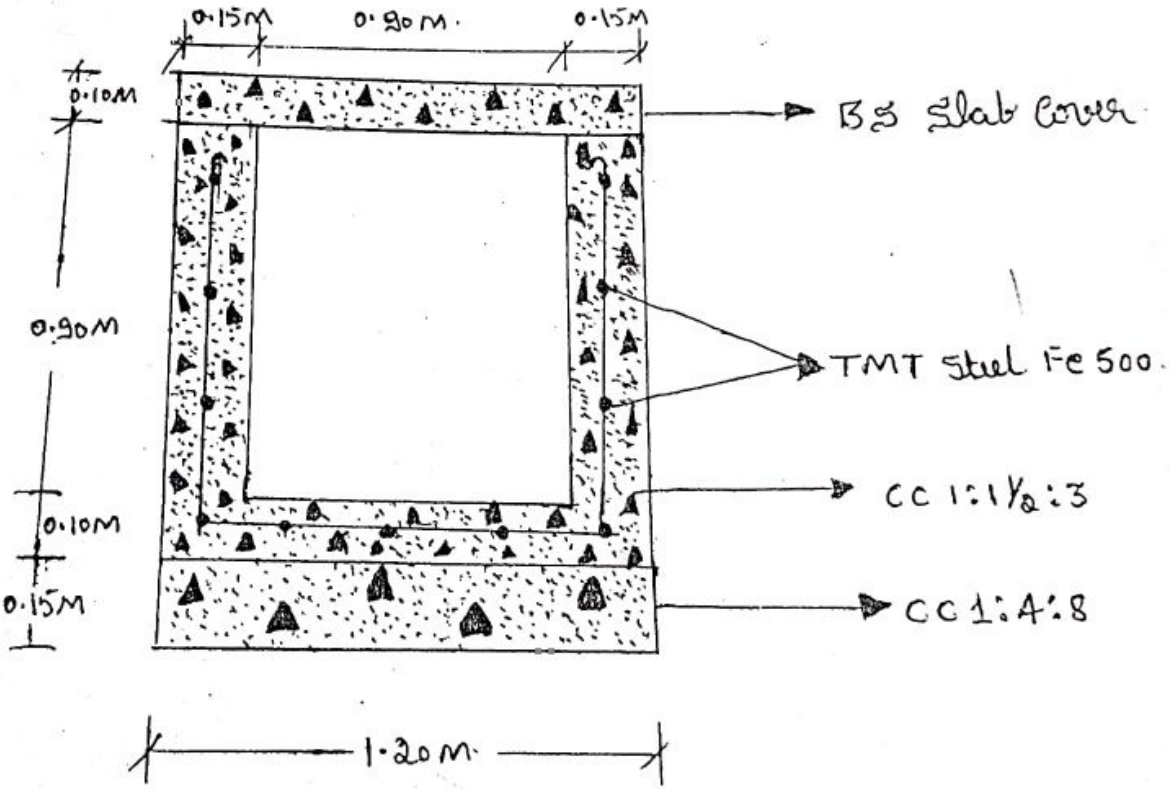

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಎ.ದಾಸರಹಳ್ಳಿ ಉಪ-ವಿಭಾಗ
ಬಾಗಲಗುಂಟೆ, ಬಿಬಿಎಂಪಿ
ಬೆಂಗಳೂರು

Scanned by CamScanner

ward-NO-15

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಜಿ. ದಾಸರಹಳ್ಳಿ ಉಪ ವಿಭಾಗ
ಬಾಗಲಗುಂಟೆ, ಬಿ.ಬಿ.ಎಂ.ಪಿ
ಬೆಂಗಳೂರು-560073

Scanned by CamScanner

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಟಿ.ದಾಸರಹಳ್ಳಿ ಉಪ-ವಿಭಾಗ
ಬಾಗಲಗುಂಟೆ, ಬಿಬಿಎಂಪಿ
ಬೆಂಗಳೂರು

Scanned by CamScanner